




SUPERIOR SILICA

SUPSIL™ REPEL

PARTICLE CHARACTERISTICS	
Purity	Available at 99% and 99.99%
Effective Diameter (nm)	100nm to 3um
Polydispersity Index	0.050
Coefficient of Variation (%)	12 %
Static Contact Angle (Water)	140°
Surface functionalization	Vinyl
Recommended Solvent	Ethanol, NMP

Solutions available in ethanol at a custom wt%.

Dry quantities available up to 1000 kg.

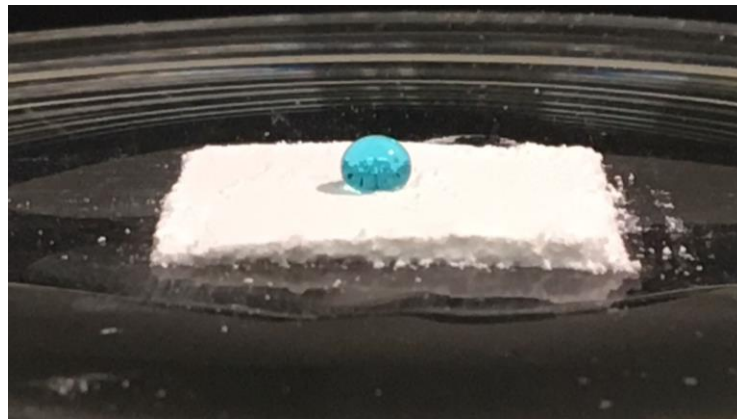

A dyed drop of water sitting on a bed of SUPSIL™ REPEL.